
## **3000 ADJUSTABLE PLATE MOUNT**

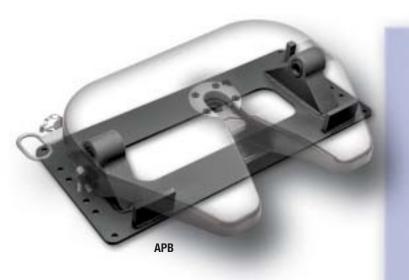

A fixed fifth wheel is economical and strong, but it limits your hauling options. Now you can get the strength and economy of a fixed fifth wheel with the flexibility of slide increments, thanks to the new Fontaine® Adjustable Plate Mount Bracket (APB).

The brackets are welded to a 3/8" steel plate that has six bolt holes on each side. This allows the fifth wheel to be moved in two inch increments to balance your load evenly.

The 3000 top plate features new greaseless bracket liners that fit on the APB plate to give you consistent lubrication, reduce wear and cut maintenance costs. The top plate is manufactured using ductile iron for increased strength.

## Adjustable Plate Mount Fifth Wheels (APB)

FIFTH WHEEL MODEL NUMBER	MOUNTING HEIGHT	3000 WEIGHT
SL3APB6250	6 <sup>1</sup> /4"	298
SL3APB7250	7 <sup>1</sup> /4"	304
SL3APB8250	8 <sup>1</sup> /4"	311

## **3000 Series Top Plate**

The economical 3000 Series does not feature the No-Slack® II technology, but it does give you several advantages over ordinary fifth wheels. The locking mechanism features a patented kingpin height sensor that acts as a safety trigger. If the kingpin enters at the wrong height it will not allow the fifth wheel to close. If you have no contact ... you have no couple. This important safety feature virtually eliminates false trailer couplings to prevent dangerous high-hitching. Approximate weight: 215 lbs.



## 3000 SERIES Approved to 94/20/EC. Directive: D-Value 150

U-Value 20

